



TARMACOAT

Anglo Tarmacoat is a tough, flexible acrylic paint for tarmac or asphalt



Colour and protect asphalt and tarmac drives, paths and playgrounds using this easy to apply coating.

Also ideal for coating and line marking in plant rooms and general light industrial areas.


One coat is generally sufficient - a second coat is recommended for rough, open textured surfaces or heavier wear areas.

- **Seals and protects**
- **Solvent free**
- **Easy to apply by brush or roller**
- **Resists UV and weathering**
- **Can be applied to damp surfaces**
- **Ideal for use inside and out**
- **Can also be used on concrete**



**SOLVENT
FREE**

Anglo Tarmacoat is available in the following colours:

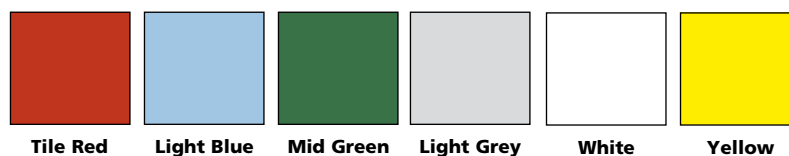

The accuracy of the colours shown above is limited by the printing process. Tile samples illustrating actual shades are available on request

PRODUCT INFORMATION

APPEARANCE

Anglo Tarmacoat is available in white, tile red, blue, grey and green. It dries to a low to mid sheen finish depending on the substrate.

AVAILABILITY

The product is supplied in 5 litre units.

LIMITATIONS

Anglo Tarmacoat will not bind or fill weak, decayed surfaces. Do not apply in constantly wet areas.

STORAGE

Store in a cool, dry place out of direct sunlight.

SHELF LIFE

At least one year in manufacturer's unopened containers.

SURFACE PREPARATION

Surfaces must be clean, sound and either dry or slightly damp. Anglo Solvent Free Degreaser may be used to remove oil and grease from the surface. Existing flaking paint or exceptionally smooth surfaces should be mechanically abraded to remove loose material and also improve adhesion.

APPLICATION

A single, even coat should be applied by either brush or medium pile roller. Avoid applying too thickly. On rough, uneven or porous surfaces, a second coat may be applied after one hour. Work should not begin if rain or temperatures under 10°C are expected.

COVERAGE

5 litres covers 20 - 30m² (single coat) depending on the texture of the surface.

The coverage rate does not allow for filling the crevices and texture of a tarmac or asphalt surface. Using the product in this way will greatly reduce coverage and extend drying time.

CURING

Cold or wet conditions will delay curing. Under normal conditions, the area may be used for light traffic after 24 hours, with 48 hours curing time required for normal use.

SAFETY PRECAUTIONS

No food products should be allowed near the area during application and drying. All product labels provide general safety information. Material Safety Data Sheets are available.

ANGLO SOLVENT FREE DEGREASER

A solvent-free product recommended for preparatory degreasing. 5 litres covers 20m² maximum.

ORDERING

Available from stockists throughout the UK. All Anglo products are sold subject to the Company's Standard Conditions of Sale.

The Company and its representatives are often asked to comment on potential uses of Anglo products that differ from those described in the Company's data sheets. Whilst in such cases the Company and its representatives will always try to offer helpful and constructive advice, the Company cannot be held responsible for the results of such uses unless they are specifically confirmed in writing by the Company.

All information is based on results gained from experience and testing and is believed to be accurate, but it is given without acceptance of liability for loss or damage attributable to reliance thereon as conditions of use lie outside our control.

WWW.ANGLOBUILD.CO.UK

Rust-Oleum UK Ltd.

Unit 6, Spitfire Close, Coventry Business Park, Coventry, CV5 6UR, United Kingdom

T +44 (0)2476 717 329 F +44 (0)2476 718 930

info.uk@ro-m.com www.ro-m.com